




OPASTAA EDELLÄSI

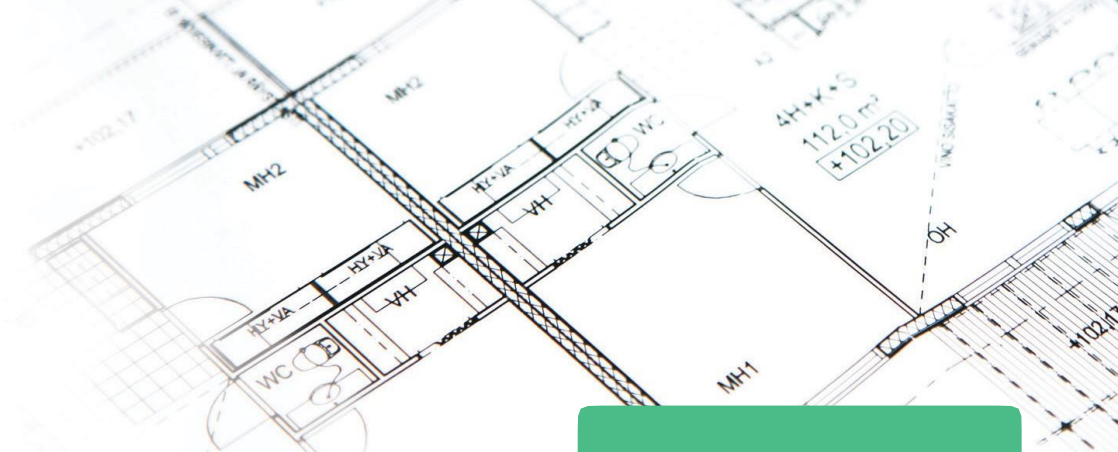





turvavalaisimet

Powerlux



www.exilight.fi

Tyyppi	Sähkönumero	Liitäntäjännite	Ottoteho	Valonlähde	Kotelointi	Asennus	Akku
Powerlux-36	42 127 59	230 V AC/DC	40 W	36W/2G10/2800lm	IP44	-o- 3x2,5mm ²	keskusakusto

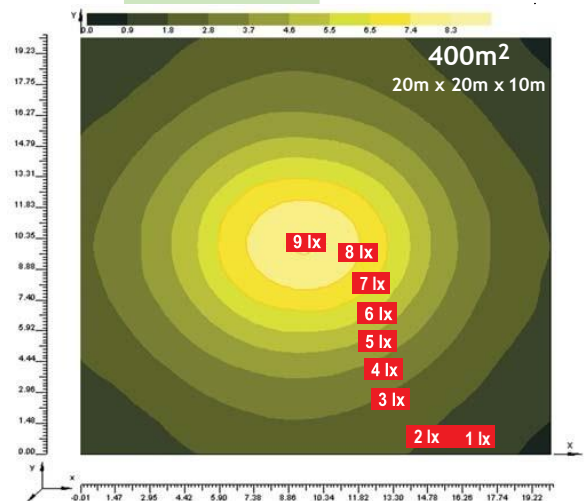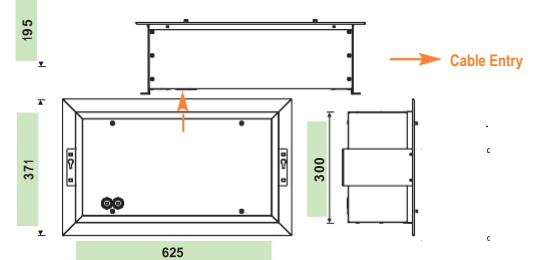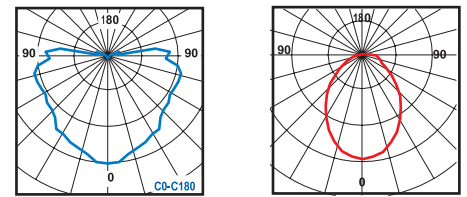

POWERLUX / ROTALUX 36W.1				
h (m)	X1	X2	Y1	Y2
8,0	11,6	28,0	10,8	28,4
10,0	12,7	30,0	12,4	30,3
12,0	13,5	33,0	13,3	32,5
14,0	13,8	35,8	13,5	34,8